

# DURABILT

INDUSTRIES, LLC



Dirt Tools

# DURABILT

INDUSTRIES, LLC



## Landscaper

6', 8', 10', 12', 14'

### KEY FEATURES

- Replaceable, Reversible 1/2" x 6" Cutting Blade
- Closed Ends Allow You To Drag Material
- 7:60 x 15" Tires on 6' and 8'
- 11L x 15" Tires on all other units
- 11L x 15" Dual Tires on 12' and 14' Heavy Duty Models



Model	Length	Width	Tire Size	Min. hp
LS06	12'6"	6 ft	7:60x15	30
LS08	12'6"	8ft	7:60x15	40
LS10	14'6"	10ft	11Lx15	45
LS12	14'6"	12ft	11Lx15	60
LS12HD	14'6"	12ft	Dual 11Lx15	80
LS14	14'6"	14ft	11Lx15	80
LS14HD	14'6"	14ft	Dual 11Lx15	80



# DURABILT

INDUSTRIES, LLC



## Tilt Landscaper

CTS Model



Center Tilt  
Axle

TS Model



Independently  
Controlled  
Axles

### KEY FEATURES

- Swivel Hitch
- Replaceable, Reversible 1/2" x 6" Cutting Blade
- Tilts approximately 20°
- Optional Tilt Indicator available

Model	Length	Width	Tire Size	Min. hp
TS08	12'6"	8ft	7:60x15	40
TS10	14'6"	10ft	11Lx15	45
CTS08	12'6"	8ft	7:60X15	40
CTS10	14'6"	10ft	11Lx15	45
CTS12	14'6"	12ft	11Lx15	60

# DURABILT

INDUSTRIES, LLC



DP84HCDB

DP84



The Dirt Pan attached to the three point lift of a tractor is intended for use in Landscaping, Agriculture and Light Construction. The unit provides an efficient means of scooping, lifting and moving soil between points without dragging the soil.

Variable cutting depth is controlled by the tractor's three point lift on all but the DB84HCDB model. Variable dig angle and dump height are hydraulically controlled by the tractor's hydraulic remote.

Model	Pan Capacity approximate	Cutting Width	Cutting Depth	Dump Height	Remotes Required	Cutting Edge	Hyd Cyl.	Tires
DP60	1 ½ yd	60"	0"- 3"	0"- 8"	Single	Replaceable	2	7:60x15
DP84	3 yd	84"	0"- 3"	0"- 8"	Single	Replaceable	2	11Lx15
DP84HC	4 yd	84"	0"- 3"	0"- 8"	Single	Replaceable	2	Dual 11Lx15
DP84HC DB	4 yd	84"	0"- 3"	0"- 8"	Dual	Replaceable	4	Dual 11Lx15



# DURABILT

INDUSTRIES, LLC



Replaceable, Reversible 1/2" x 6"  
Cutting Blade  
Small compact design perfect  
for driveways

## GR08 Utility Grader

Model	Hitch	Swivel	Tilt	Remotes Required	Horsepower	Tires
GR08	Cat 2 (2-point)	Approx 45°	Approx 20°	Single	20hp min 60hp max	26x12x12 Turf Tire

# DURABILT

INDUSTRIES, LLC



## Swivel Scraper 7' or 8'



- Replaceable, Reversible 1/2" x 6" Cutting Blade
- Blade can be offset 24" left or right of center
- Can be tilted from level up to 24"
- Optional swing cylinder available to offset the blade to the right or left from the tractor seat

Model	Weight	Description
SS07	480	7' HEAVY DUTY REAR BLADE W/MANUAL ANGLE, TILT AND OFFSET
SS08	530	8' HEAVY DUTY REAR BLADE W/MANUAL ANGLE, TILT AND OFFSET
SSHOK		HYDRAULIC OFFSET KIT



# DURABILT

INDUSTRIES, LLC



## Pasture Punch – Smooth Roller



12' shown with dual tires

- Relieves Compaction
- Promotes Air & Water Movement
- Helps Activate Fertilizer & Lime
- Relieves Root Boundness

Pasture Punch  
30" OD – 3/8" Wall Drum  
Smooth Roller  
42" OD – 3/8" Wall Drum



**Comes in 6' Three Point Mount  
or 8', 10' and 12' Pull Type**



# DURABILT


INDUSTRIES, LLC



## LOT LEVELER

### KEY FEATURES

- **18" Tall box**
- **Can come with either Offset or Parallel Blades**
- **Fits Cat-1 and Cat-2**

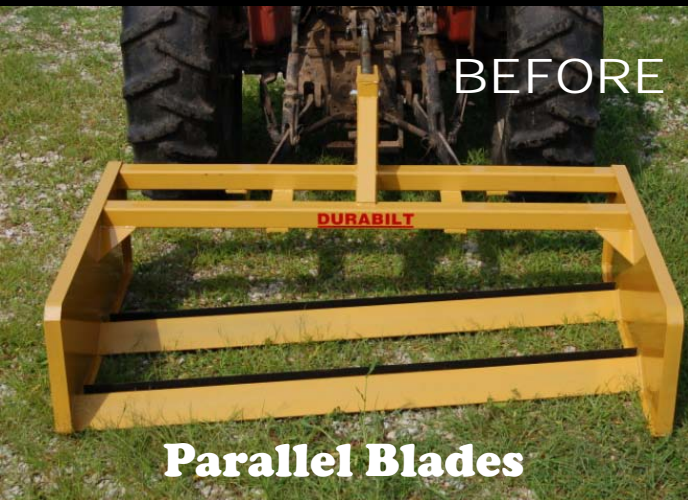

Model	Box Height	Box Length	Description
LL06OB	18"	47"	6' HEAVY DUTY LOT LEVELER WITH OFFSET BLADES
LL06PB	18"	47"	6' HEAVY DUTY LOT LEVELER WITH PARALLEL BLADES